

DYNACO M3 POWER

Push-Pull
gear driven technology




outside door

DYNACO M3 POWER

The DYNACO Power M3 is specifically designed for large sized outside applications with intensive use. It protects your facilities against wind, rain, snow, dirt and extreme temperatures. Operating speed and perfect sealing properties improve your traffic flows and provide employee comfort, environmental control and savings on energy costs. Fully self-reinserting, the DYNACO Power M3 will automatically reinsert itself in its side guides when the curtain is accidentally hit.

- **PATENTED "PUSH PULL" TECHNOLOGY:**
Unique door drive system.
- **SUPERIOR SEAL, WIND RESISTANT:**
Patented side frame assembly. No blade nor brush systems. Up to wind load class 3.
- **CRASH FORGIVING AND SELF-REINSERTING WITHOUT INTERVENTION:**
The curtain automatically reinserts itself when dislodged. No repair costs, no production down time.
- **USER SAFETY:**
Flexible curtain without rigid elements.
- **COMFORT OF USE:**
DYNACO wireless detector at the bottom.
- **ADVANCED DRIVE:**
Frequency driven motor and encoder for smooth operation. Wearable elements are reduced to a minimum.
- **DYNALOGIC CONTROL BOX:**
User-friendly control box with self-diagnosis.
- **CONFORM TO EN13241-1**

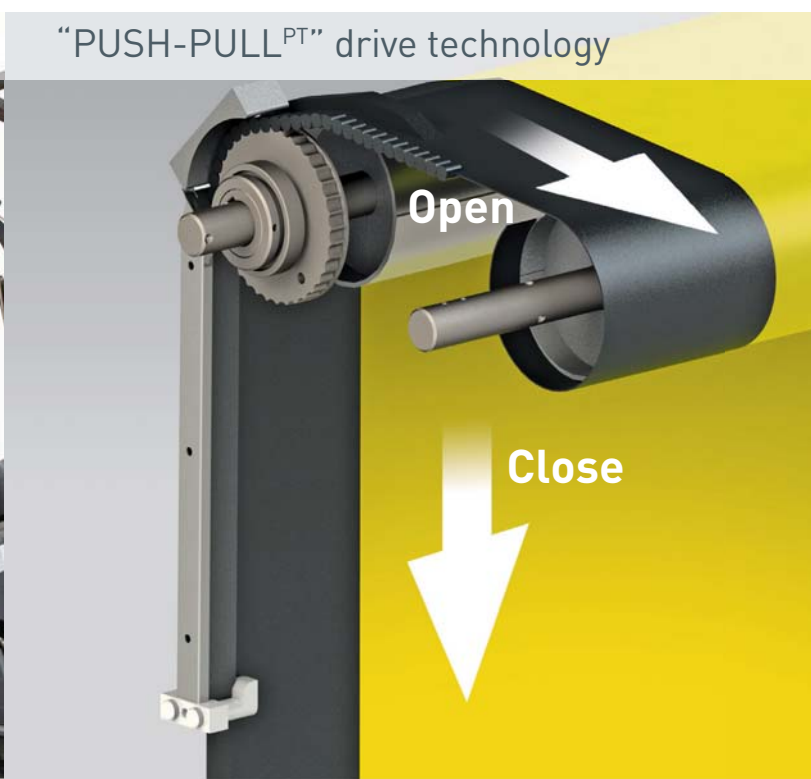

Push-Pull

gear driven technology

outside door



EN13241-1 STANDARDS

Standard	Ref.	Test acc.	Results
Water permeability	EN 12425	EN 12489	Class 1
Wind load	EN 12424	EN 12444	Class 2*
Wind permeability	EN 12426	EN 12427	Class 1
Safe openings	EN 12453	EN 12445	Pass
Mechanical resistance	EN 12604	EN 12605	Pass
Unintended movements	EN 12604	EN 12605	Pass
Thermal resistance	EN 12428	EN 12428	6,02 W/m²K
Performance (cycles)	EN 12604	EN 12605	750.000

* The indicated class for wind resistance applies for maximum dimensions. For doors up to W 6.000mm x H 5.500mm: Class 3


CHARACTERISTICS

Max. dimensions	W 9.000 mm x H 5.500 mm								
Opening speed Closing speed	0,8 m/s 0,4 m/s								
Structure	Galvanised steel: 100 x 50 x 3 mm								
Drum	Steel - Ø 140 x 4 mm.								
Side guides	Reinforced polyethylene (PE-UHMW1000) on springs. Lower 300 mm of side guides reinforced.								
Motor	4 poles, without brake. Power 1,5 kW IP rating: IP 65								
Control box	DYNALOGIC provided with: circuit breaker, general divider, adjustable timer, push button for opening and reset and emergency stop. IP rating: IP 54. Frequency inverter.								
Standard detectors	Infrared barrier: 300 mm from the floor. Wireless DYNACO detector (WDD).								
Power supply Frequency	Single phase 230V - 18 A Frequency: 50-60 Hz								
Available colours comparable with:	<table> <tr> <td>Yellow RAL1003</td><td>Green RAL6005</td></tr> <tr> <td>Orange RAL2004</td><td>Grey RAL7035</td></tr> <tr> <td>Red RAL3000</td><td>White RAL9010</td></tr> <tr> <td>Blue RAL5002</td><td>Black RAL9005</td></tr> </table>	Yellow RAL1003	Green RAL6005	Orange RAL2004	Grey RAL7035	Red RAL3000	White RAL9010	Blue RAL5002	Black RAL9005
Yellow RAL1003	Green RAL6005								
Orange RAL2004	Grey RAL7035								
Red RAL3000	White RAL9010								
Blue RAL5002	Black RAL9005								
(Actual colours may deviate. Colour samples available upon request)									


Side reinforcement



Side guide and lateral driving strap view

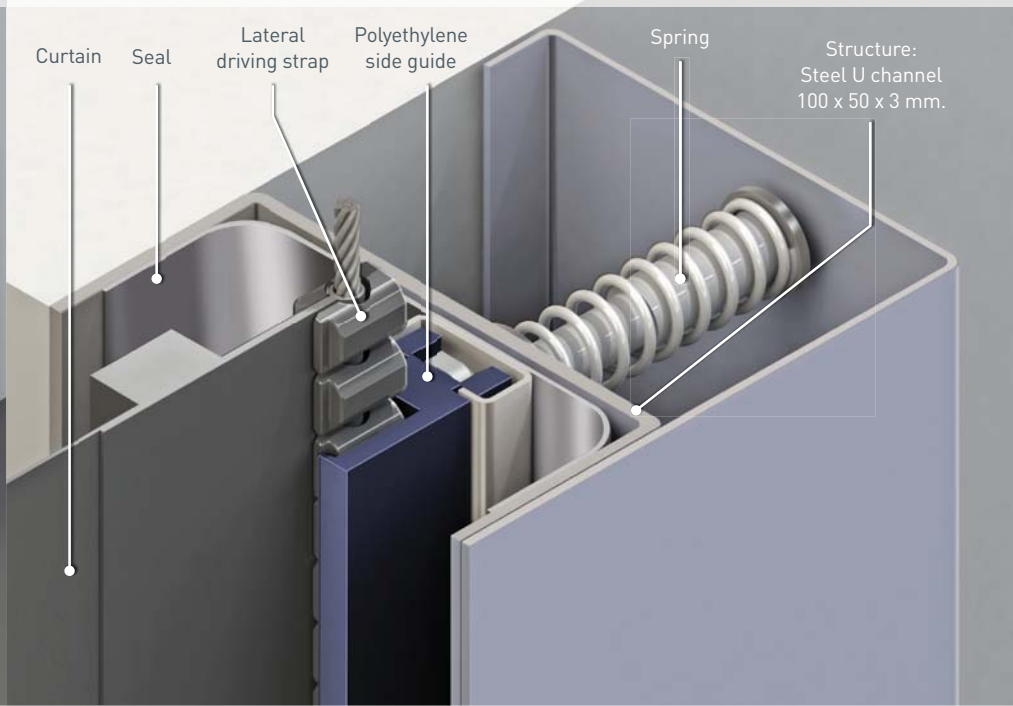

Dimensions and installation requirements DYNACO M3 POWER

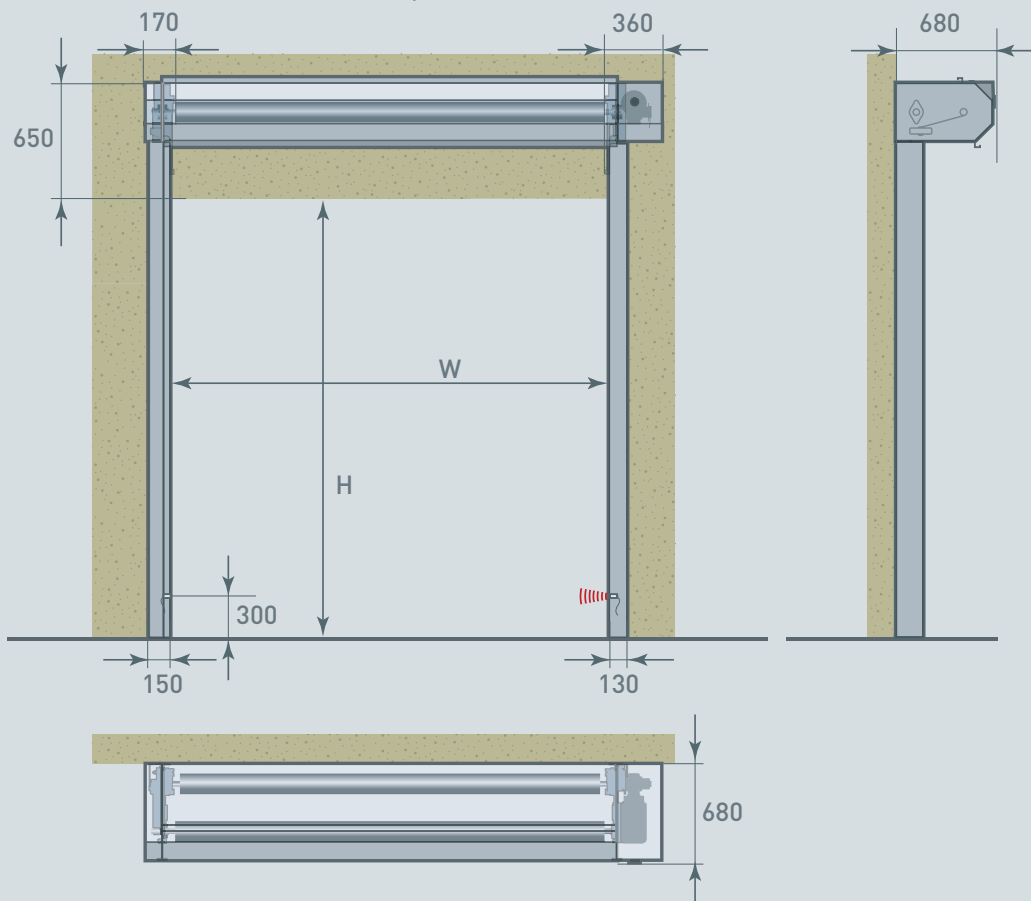

All indicated dimensions are net: the space necessary for mounting and maintenance has to be provided. Remark: drum cover available for doors up to 5900mm wide.

REMARK: Based on the risk analysis of the environment, extra push buttons, detectors and covers might be required.

© All rights reserved by Dynaco – 2013

The DYNACO Entrematic products are protected by worldwide registered patents. As part of its policy of continuous product development, DYNACO Entrematic reserves the right to change the characteristics of its products or components without prior notice.

Disclaimers:

For a correct use of our products, please refer to our manual.

Everything that is mentioned in this brochure is only valid under the terms of use in the user manual and on condition that the door was properly installed and maintained and has not undergone abuse nor neglect.

 **DYNACO**
ENTRE//MATIC

DYNACO ENTREMATIc
Waverstraat 21
B-9310 Moorsel-Aalst (Belgium)
Tel. +32 53 72 98 98
Fax. +32 53 72 98 50
info.dynaco.eu@entrematic.com
www.dynaco.eu